

BETA SIREN AMPLIFIERS

BETA112X.


Remote mounted amplifier with Public Address and HANDS-FREE operation, multiple warning tones and horn ring over-ride capability. BETA Sirens allow easy set-up and configuration to meet local requirement.




FEATURES:

- Perfect for overt and covert applications.
- Public Address & five siren tones available. Use up to four tones: Wail, Yelp, Piercer or Hi/Low and Air Horn.
- Hands Free operation allows the driver to turn the siren ON, activate the YELP, WAIL or TWO TONE/PIERCER tones and turn the siren OFF from the vehicles road horn button. Hands free control allows the driver to control the siren system without taking his eyes off the road and hands off the steering wheel.
- Conveniently accessible dip switches on remote amplifier allows instant configuration of popular operating features.
- Output open/short circuit protection.
- Optional Incident Data Recorder (IDR) signal output.

12 VDC	24 VDC	100 WATTS	HANDS FREE
YELP	WAIL	2 TONE	PIERCER
AIR HORN	PA	CUSTOMER PROGRAM	2 YEAR WARRANTY
			e11
			NPIA AES Spec 5 Issue 10 Fully Compliant

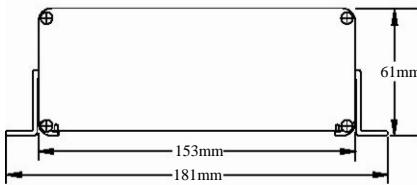

Optional BETA1 Control Head for 12V & 24V amplifiers with noise cancelling microphone. Allows full manual control of the BETA amplifier by the operator.

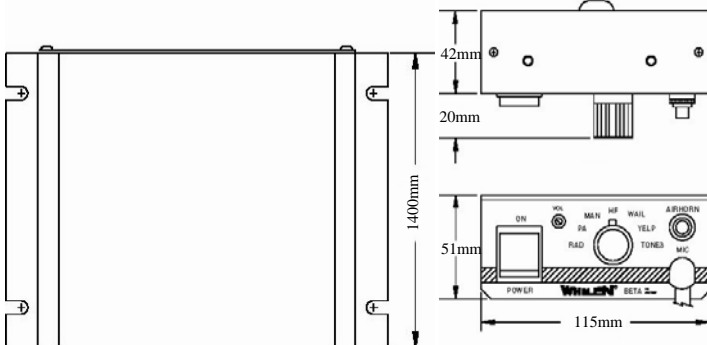

Part Numbers:

BETA112X - 12V remote amplifier
 BETA124X - 24V remote amplifier
 BETA1 - Optional control head
 BETA12-IDR Optional Incident Data Recorder signal driver.



WOODWAY®
 Woodway Engineering Limited

The licensed manufacturer for
 European Certified
WHELEN®
 products